

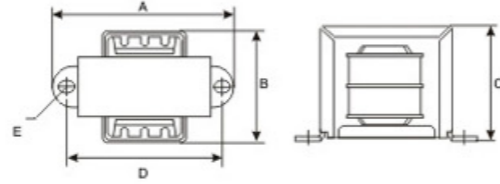


EI Power Transformer EI电源变压器

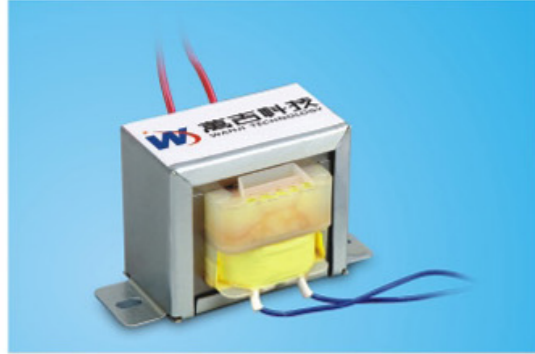

External Dimension 外形尺寸

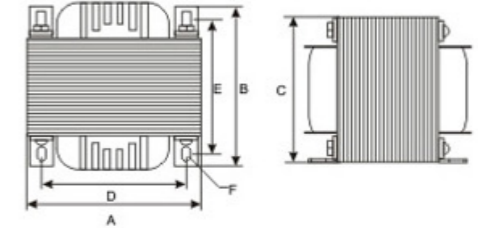

External Dimension 外形尺寸

Wanji designs and manufactures EI Lamination Power Transformer to meet the demands of different power, insulation and mounting under using various international standards of bobbins. This series of transformers are relatively economic and easy mounting with wide application.

万吉设计生产的EI型电源变压器，采用多种国际标准骨架和真空浸漆，满足不同功率、绝缘和安装的要求。该系列变压器成本相对节约，方便安装，应用广泛。

■ SPECIFICATION 规格:

- Power Range功率范围: 3VA -2000VA
- Input/Output输入/输出: Customized客户定制
- Insulation Class绝缘等级: UL class B, F, H, N. (Optional可选)
- Isolation隔离: 3.75KV(Hi-pot 耐压)

| Model 型号 | Spec. 规格 | Power 功率(VA) | Dimension 外型尺寸(mm) | | | Installation Size 安装尺寸(mm) | HoleDia. 安装孔(mm) | Weight 重量(Kg) | Approval 产品认证 |
|-------------|-------------|-----------------|-----------------------|----|----|-------------------------------|---------------------|------------------|------------------|
| | | | A | B | C | | | | |
| EI35 | 35*15 | 3 | 61 | 35 | 32 | 48 | 3.9*7 | 0.14 | UL/CE/RoHS/CQC |
| EI41 | 41*16 | 5 | 67 | 34 | 37 | 54 | 3.9*7 | 0.19 | UL/CE/RoHS/CQC |
| | 41*26 | 8 | 70 | 45 | 37 | 55 | 3.8*7 | 0.29 | UL/CE/RoHS/CQC |
| EI48 | 48*20 | 10 | 77 | 39 | 43 | 60 | 3.9*7 | 0.32 | UL/CE/RoHS/CQC |
| | 48*24 | 12 | 74 | 45 | 43 | 60 | 3.9*7 | 0.36 | UL/CE/RoHS/CQC |
| EI57 | 57*25 | 18 | 88 | 48 | 50 | 73 | 3.9*7 | 0.55 | UL/CE/RoHS/CQC |
| | 57*30 | 25 | 90 | 53 | 50 | 74 | 3.9*7 | 0.66 | UL/CE/RoHS/CQC |
| EI66 | 66*28 | 30 | 93 | 56 | 58 | 79 | 4.8*7 | 0.81 | UL/CE/RoHS/CQC |
| | 66*40 | 55 | 96 | 68 | 59 | 82 | 4.8*7 | 1.2 | UL/CE/RoHS/CQC |
| EI76 | 76*32 | 65 | 110 | 64 | 67 | 96 | 4.8*7 | 1.35 | UL/CE/RoHS/CQC |
| | 76*45 | 100 | 106 | 75 | 67 | 90 | 4.8*8 | 1.8 | UL/CE/RoHS/CQC |
| EI86 | 86*40 | 130 | 117 | 75 | 75 | 101 | 4.8*8 | 2.1 | UL/CE/RoHS/CQC |
| | 86*45 | 150 | 117 | 80 | 75 | 101 | 4.8*8 | 2.4 | UL/CE/RoHS |

| Model 型号 | Spec. 规格 | Power 功率(VA) | Dimension 外型尺寸(mm) | | | Installation Size 安装尺寸(mm) | | HoleDia. 安装孔(mm) | Weight 重量(Kg) | Approval 产品认证 |
|-------------|-------------|-----------------|-----------------------|-----|-----|-------------------------------|-----|---------------------|------------------|------------------|
| | | | A | B | C | D | E | | | |
| EI76 | 76*45 | 100 | 76 | 82 | 64 | 64 | 70 | 5*9 | 1.85 | UL/CE/RoHS/CQC |
| | 76*50 | 110 | 76 | 87 | 64 | 64 | 75 | 5*9 | 2.10 | UL/CE/RoHS/CQC |
| EI86 | 86*40 | 120 | 86 | 77 | 72 | 71 | 65 | 5*9 | 2.22 | UL/CE/RoHS/CQC |
| | 86*50 | 150 | 86 | 87 | 72 | 71 | 75 | 5*9 | 2.35 | UL/CE/RoHS/CQC |
| EI96 | 96*40 | 170 | 96 | 77 | 80 | 80 | 65 | 5*9 | 2.67 | UL/CE/RoHS/CQC |
| | 96*50 | 200 | 96 | 87 | 80 | 80 | 75 | 5*9 | 3.34 | UL/CE/RoHS/CQC |
| | 96*60 | 280 | 96 | 97 | 80 | 80 | 85 | 5*9 | 3.75 | UL/CE/RoHS/CQC |
| EI105 | 105*50 | 250 | 105 | 91 | 88 | 88 | 75 | 5*9 | 3.82 | UL/CE/RoHS/CQC |
| | 105*60 | 300 | 105 | 101 | 88 | 88 | 85 | 5*9 | 4.75 | UL/CE/RoHS/CQC |
| EI114 | 114*50 | 350 | 114 | 95 | 95 | 95 | 75 | 5*9 | 4.56 | UL/CE/RoHS/CQC |
| | 114*60 | 400 | 114 | 105 | 95 | 95 | 85 | 5*9 | 5.25 | UL/CE/RoHS/CQC |
| | 114*70 | 450 | 114 | 115 | 95 | 95 | 95 | 5*9 | 6.12 | UL/CE/RoHS/CQC |
| EI133 | 133*65 | 500 | 133 | 115 | 111 | 111 | 90 | 6*10 | 7.85 | UL/CE/RoHS/CQC |
| | 133*90 | 700 | 133 | 140 | 111 | 111 | 115 | 6*10 | 11.2 | UL/CE/RoHS/CQC |
| EI152 | 152*80 | 800 | 152 | 140 | 127 | 127 | 105 | 6*10 | 14.8 | UL/CE/RoHS/CQC |
| | 152*100 | 900 | 152 | 160 | 127 | 127 | 125 | 6*10 | 16.2 | UL/CE/RoHS/CQC |
| EI168 | 168*80 | 1000 | 168 | 145 | 140 | 140 | 105 | 6*10 | 16.3 | UL/CE/RoHS/CQC |
| | 168*100 | 1500 | 168 | 165 | 140 | 140 | 105 | 6*10 | 18.6 | UL/CE/RoHS/CQC |
| EI192 | 192*100 | 2000 | 192 | 170 | 160 | 160 | 125 | 6*10 | 21.8 | UL/CE/RoHS/CQC |

Remark: All data are subjected to modification without prior notice.
备注: 未经通知可自行调整参数。