

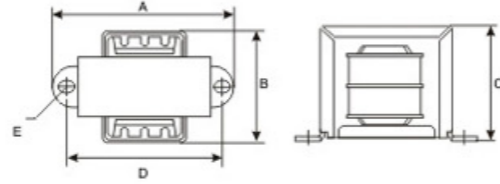


# EI Power Transformer EI电源变压器

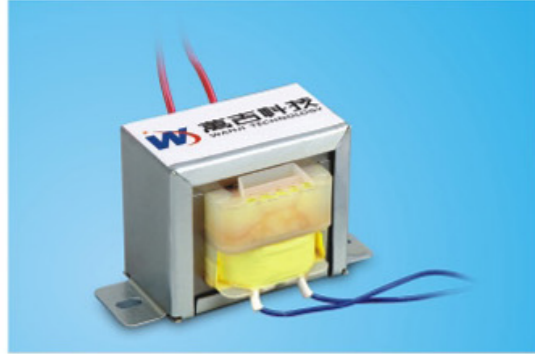

External Dimension 外形尺寸

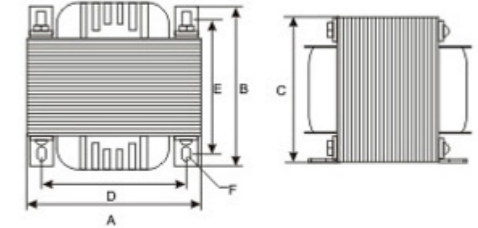

External Dimension 外形尺寸

Wanji designs and manufactures EI Lamination Power Transformer to meet the demands of different power, insulation and mounting under using various international standards of bobbins. This series of transformers are relatively economic and easy mounting with wide application.

万吉设计生产的EI型电源变压器，采用多种国际标准骨架和真空浸漆，满足不同功率、绝缘和安装的要求。该系列变压器成本相对节约，方便安装，应用广泛。

### ■ SPECIFICATION 规格:

- Power Range功率范围: 3VA -2000VA
- Input/Output输入/输出: Customized客户定制
- Insulation Class绝缘等级: UL class B, F, H, N. (Optional可选)
- Isolation隔离: 3.75KV(Hi-pot 耐压)

Model 型号	Spec. 规格	Power 功率(VA)	Dimension 外型尺寸(mm)			Installation Size 安装尺寸(mm)	HoleDia. 安装孔(mm)	Weight 重量(Kg)	Approval 产品认证
			A	B	C				
EI35	35*15	3	61	35	32	48	3.9*7	0.14	UL/CE/RoHS/CQC
EI41	41*16	5	67	34	37	54	3.9*7	0.19	UL/CE/RoHS/CQC
	41*26	8	70	45	37	55	3.8*7	0.29	UL/CE/RoHS/CQC
EI48	48*20	10	77	39	43	60	3.9*7	0.32	UL/CE/RoHS/CQC
	48*24	12	74	45	43	60	3.9*7	0.36	UL/CE/RoHS/CQC
EI57	57*25	18	88	48	50	73	3.9*7	0.55	UL/CE/RoHS/CQC
	57*30	25	90	53	50	74	3.9*7	0.66	UL/CE/RoHS/CQC
EI66	66*28	30	93	56	58	79	4.8*7	0.81	UL/CE/RoHS/CQC
	66*40	55	96	68	59	82	4.8*7	1.2	UL/CE/RoHS/CQC
EI76	76*32	65	110	64	67	96	4.8*7	1.35	UL/CE/RoHS/CQC
	76*45	100	106	75	67	90	4.8*8	1.8	UL/CE/RoHS/CQC
EI86	86*40	130	117	75	75	101	4.8*8	2.1	UL/CE/RoHS/CQC
	86*45	150	117	80	75	101	4.8*8	2.4	UL/CE/RoHS

Model 型号	Spec. 规格	Power 功率(VA)	Dimension 外型尺寸(mm)			Installation Size 安装尺寸(mm)		HoleDia. 安装孔(mm)	Weight 重量(Kg)	Approval 产品认证
			A	B	C	D	E			
EI76	76*45	100	76	82	64	64	70	5*9	1.85	UL/CE/RoHS/CQC
	76*50	110	76	87	64	64	75	5*9	2.10	UL/CE/RoHS/CQC
EI86	86*40	120	86	77	72	71	65	5*9	2.22	UL/CE/RoHS/CQC
	86*50	150	86	87	72	71	75	5*9	2.35	UL/CE/RoHS/CQC
EI96	96*40	170	96	77	80	80	65	5*9	2.67	UL/CE/RoHS/CQC
	96*50	200	96	87	80	80	75	5*9	3.34	UL/CE/RoHS/CQC
	96*60	280	96	97	80	80	85	5*9	3.75	UL/CE/RoHS/CQC
EI105	105*50	250	105	91	88	88	75	5*9	3.82	UL/CE/RoHS/CQC
	105*60	300	105	101	88	88	85	5*9	4.75	UL/CE/RoHS/CQC
EI114	114*50	350	114	95	95	95	75	5*9	4.56	UL/CE/RoHS/CQC
	114*60	400	114	105	95	95	85	5*9	5.25	UL/CE/RoHS/CQC
	114*70	450	114	115	95	95	95	5*9	6.12	UL/CE/RoHS/CQC
EI133	133*65	500	133	115	111	111	90	6*10	7.85	UL/CE/RoHS/CQC
	133*90	700	133	140	111	111	115	6*10	11.2	UL/CE/RoHS/CQC
EI152	152*80	800	152	140	127	127	105	6*10	14.8	UL/CE/RoHS/CQC
	152*100	900	152	160	127	127	125	6*10	16.2	UL/CE/RoHS/CQC
EI168	168*80	1000	168	145	140	140	105	6*10	16.3	UL/CE/RoHS/CQC
	168*100	1500	168	165	140	140	105	6*10	18.6	UL/CE/RoHS/CQC
EI192	192*100	2000	192	170	160	160	125	6*10	21.8	UL/CE/RoHS/CQC

Remark: All data are subjected to modification without prior notice.  
备注: 未经通知可自行调整参数。