


# EI Transformer for Industrial Control

## 工业控制用EI型电源变压器

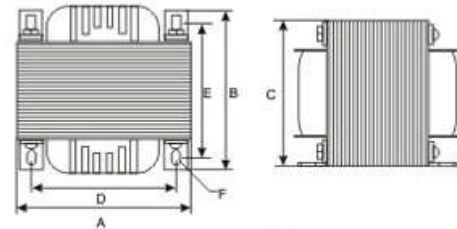

External Dimension 外形尺寸

EI Transformer for Industrial Control offers double primaries and double secondaries with low-operating-temperature, low-mechanical-hum and easy mounting. It's widely used for electrical control and power isolation of industry machine tool and mechanical equipments.

万吉工业控制用EI型电源变压器，能为产品提供多组输入和输出，具有低温升、低噪音和方便安装等特点，广泛用于工业或工矿企业机床和机械设备中一般电器的控制电力、电源隔离之用。

### ■ SPECIFICATION 规格：

- Power Range功率范围：100VA -2000VA
- Input/Output输入/输出：Customized客户定制
- Insulation Class绝缘等级：UL class B, F, H, N. (Optional可选)
- Isolation隔离：3.75KV(Hi-pot 耐压)

Model 型号	Spec. 规格	Power 功率(VA)	Efficiency 效率(%)	Dimension 外型尺寸(mm)			Installation Size 安装尺寸(mm)		HoleDia. 安装孔(mm)	Weight 重量(Kg)	Approval 产品认证
				A	B	C	D	E			
EI76	76*45	100	83.5	76	82	64	64	70	5*9	1.85	UL/CE/RoHS/CQC
	76*50	110	84.2	76	87	64	64	75	5*9	2.10	UL/CE/RoHS/CQC
EI86	86*40	120	84.8	86	77	72	71	65	5*9	2.22	UL/CE/RoHS/CQC
	86*50	150	85.3	86	87	72	71	75	5*9	2.35	UL/CE/RoHS/CQC
EI96	96*40	170	86.8	96	76	80	80	65	5*9	2.67	UL/CE/RoHS/CQC
	96*60	250	89.6	96	96	80	80	85	5*9	3.75	UL/CE/RoHS/CQC
EI105	105*60	300	90.3	105	99	88	80	85	5*9	4.75	UL/CE/RoHS/CQC
EI114	114*50	350	91.5	114	95	95	95	75	5*9	4.56	UL/CE/RoHS/CQC
	114*70	450	91.8	114	115	95	95	95	5*9	6.12	UL/CE/RoHS/CQC
EI133	133*65	500	92.5	133	115	111	111	90	6*10	7.85	UL/CE/RoHS/CQC
	133*90	700	93.6	133	140	111	111	115	6*10	11.2	UL/CE/RoHS/CQC
EI152	152*80	800	93.6	152	140	127	127	105	6*10	14.8	UL/CE/RoHS/CQC
	152*100	900	94.2	152	160	127	127	125	6*10	16.2	UL/CE/RoHS/CQC
EI168	168*80	1000	94.8	168	145	140	140	105	6*10	16.3	UL/CE/RoHS/CQC
	168*100	1500	95.2	168	165	140	140	105	6*10	18.6	UL/CE/RoHS/CQC
EI192	192*100	2000	96.5	192	170	160	160	125	6*10	21.8	UL/CE/RoHS/CQC

Remark: All data are subjected to modification without prior notice.

备注：未经通知可自行调整参数。